

Product Information


DH851 2Easy DH system door station



DESCRIPTION

2Easy DH system apartment door station with mechanical keypad and 3.4-inch touch screen


DIMENSION

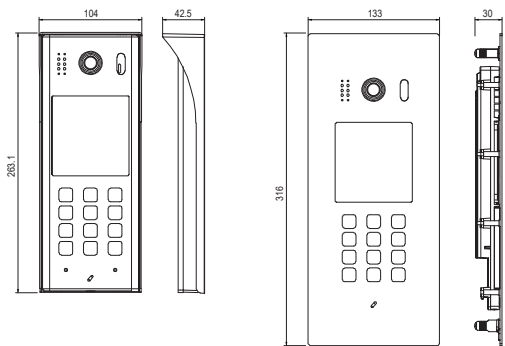


FEATURES

- Two mounting options surface and flush
- Surface mount: zinc alloy
- Flush mount: stainless steel
- 2MP 1080 starlight camera
- Optional 2MP 720 fisheye starlight camera
- IP54 protection against dust and water
- Mechanical SS316 backlit call button
- 3.5-inch 480*480 TFT touch screen
- Under-screen RFID/Mifare card reader
- Easy to setup and use

Parts and Functions

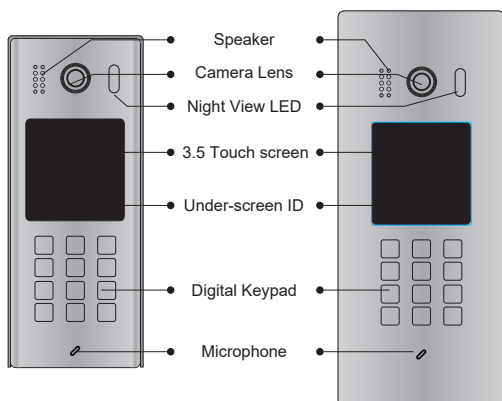


Terminal Description

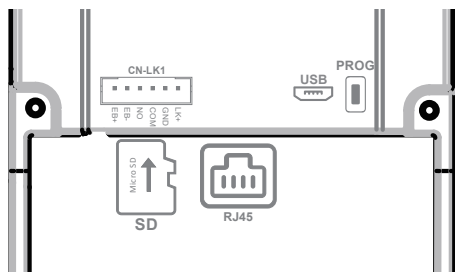

- **CH-LK1:** lock terminal
- **SD card:** Sd card slot
- **Prog:** Program button
- **USB.:** Debug port
- **LAN:** Reserved
- **DH-BUS:** 2Easy DH bus line


Mounting

Half flush mounting

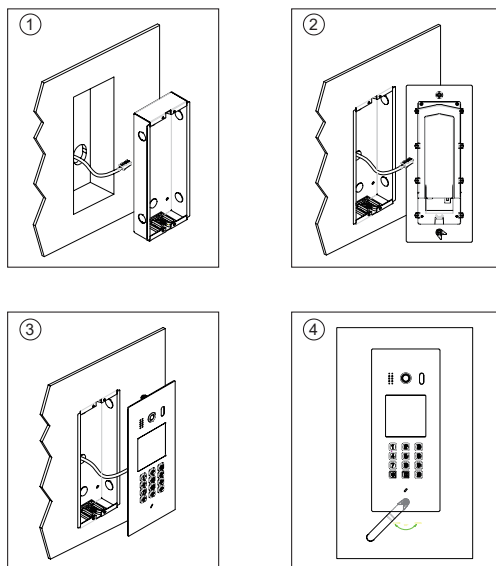

1. Drill a hole in the wall to match the size of the mounting box and attach to the wall.
2. Connect the cable correctly and make sure ratchet bolt on the bottom is in "Open" position.
3. Make sure the install is firmly, and use the wrench tool to locking the ratchet to "Close" position.

Surface mounting

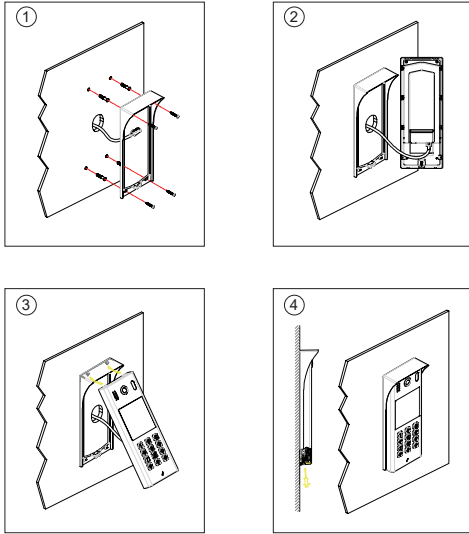

1. Drill holes in the wall to match the size of screw stoppers, then attach the rainy cover and main unit to the wall.
2. Connect the cable correctly.
3. Install the door station, hook up from the top with the rain cover and then amount the door panel.

Specification

Power Source:	24Vdc ~ 30Vdc
Standby current:	100mA/2.8W
Working current:	145mA/4 W
TFT screen :	3.4" TFT touch screen
Resolution:	480*480
Camera(1080p):	2MP Horizontal 150 degree
Dimension:	263(H)×114(W)×42.5(D)mm (Surface) 316(H)×133(W)×46(D)mm (Flush)

Ordering Information



Model No.	Description
DH851	Surface Zinc alloy panel, keypad, 150-degree 1080p camera, under-screen card reader
DH851F	Flush stainless steel, keypad, 150-degree 1080p camera, under-screen card reader